

Laser Marking System

# Videojet® 3340

Increased throughput and productivity through extended high-speed capabilities and the industry's largest mark field.

Packaging operations that require high-quality, crisp codes for marking at high speeds can rely on the Videojet 3340 CO<sub>2</sub> laser solution to help meet maximum throughput with consistent print quality.

With virtually no font, code or graphic restrictions and line speeds up to 900 m/min., the 3340 is an ideal solution for marking complex codes at high speeds in food, beverage, cosmetics, pharmaceutical and extrusion industries.



## Uptime Advantage

- Maximum performance and extended laser source life expectancy up to 45,000 hours through optimized total power output
- Air-cooled laser source virtually eliminates maintenance intervals
- Line set up wizard, available with optional CLARiTY™ Laser Controller, aids fast product changeovers, eliminating set up trial and error and minimizing planned downtime

## Built-in productivity

- Largest marking window in the industry offers optimally matched applications for higher throughput
- On-screen diagnostics, available with optional CLARiTY™ Laser Controller, track causes of downtime and help troubleshooting to get the line back up and running quickly
- High speed capability allows marking at 150,000 products per hour

## Code Assurance

- Optional CLARiTY™ Laser Controller offers built-in software features that help reduce operator errors and ensure products are coded correctly
- High-quality, permanent codes help assure product traceability and tamper-proofing
- High-resolution marking head delivers consistent, crisp codes

## Simple usability

- Most flexible integration solution with 32 standard beam delivery options
- Quick set up and easy redeployment via detachable umbilical cable for easy routing on the line and simple-to-use accessory connections
- 5 interface options plus a choice of networking communications to match your preferred workflow

# Videojet® 3340

## Laser Marking System

### Marking speed

Up to 2,000 characters/sec.<sup>(1)</sup>

### Line speed

Up to 15m/sec. (49ft/sec.)<sup>(1)</sup>

### Marking window

Approx. 30.8x38.2mm<sup>2</sup> to 601.0x439.8mm<sup>2</sup>

### Wavelengths

10.6µm, 10.2µm and 9.3µm

### Marking formats

Standard industrial fonts (Type 1 Windows® TrueType®) and Single line fonts  
Machine readable codes (OCR, 2D-matrix, etc.)  
Bar codes: BC25, BC251, BC39, BC128, GS1-128, EAN13, UPC\_A, RSS14, RSS14 Truncated, RSS14 Stacked, RSS14 Stacked Omnidirectional, RSS Limited, RSS Expanded, etc.  
Graphics, logos, symbols, etc.  
Linear, circular, angular, reverse, rotate  
Sequential and batch numbering  
Automatic date, layer and time coding; real-time clock  
Dot mode enables marking 2D codes faster than traditional grid mode

### Laser tube

Sealed CO<sub>2</sub> laser, power class 30-Watt

### Beam deflection

Steered beam with digital high-speed galvanometer scanners

### Focusing

Focal lengths: 64/ 95/ 127/ 190/ 254 mm (2.5/ 3.75/ 5.0/ 7.5/ 10.0 inches);  
63.5/ 85/ 100/ 150/ 200/ 300/ 351/ 400 mm (2.50/ 3.35/ 3.94/ 5.9/ 7.87/ 11.8/ 13.8/ 15.75 inches); 400/ 500/ 600 mm (15.75/ 19.68/ 23.62 inches)

### Multiple operator interface options

Handheld controller  
PC software  
TCS Touch Control Software  
CLARiTY™ Laser Controller  
Smart Graph Com

### Language capabilities<sup>(2)</sup>

Arabic, Bulgarian, Czech, Danish, English, German, Greek, Finnish, French, Hebrew, Hungarian, Italian, Japanese, Korean, Dutch, Norwegian, Polish, Portuguese, Romanian, Russian, Serbian, Simplified Chinese, Slovak, Spanish, Swedish, Thai, Traditional Chinese, Turkish, Vietnamese; interface dependent. Additional languages available with Smart Graph software.

<sup>(1)</sup> Maximum marking and line speed is application dependent

<sup>(2)</sup> With optional CLARiTY™ Laser Controller

#### INVISIBLE LASER RADIATION

AVOID EYE OR SKIN EXPOSURE  
TO DIRECT OR SCATTERED RADIATION

MAX. AVERAGE POWER: 45 W  
WAVELENGTH: λ = 9-11 nm  
LASER CLASS 4  
(EN 60825-1:2014)

### Communication

Ethernet, TCP/IP and RS232 optional  
Inputs for encoders and product detector triggers  
16 inputs / 11 outputs for start/stop signals, machine/operator interlocks, alarm outputs; in addition to the safety circuits  
Customer-specific solutions available

### Integration

Direct integration into complex production lines via scripting interface  
Flexible beam delivery options (beam extension unit/ beam turning unit)  
Detachable umbilical for simple integration; available in 3 lengths

### Electrical requirements

100-240 VAC (autorange), ~50/60Hz, 1PH, 0.70KW

### Cooling system

Air cooled

### Environment

Temperature 40-105° F (5-40° C)  
Humidity 10%-90%, non-condensing

### Sealing and safety standards

Supply Unit: IP54, optional IP65  
Marking Unit: IP54, optional IP65  
Optional safety module provides Performance Level d (PFL-d) in accordance to EN 13849-1  
IEC/EN 60825-1:2014


### Approximate weight

Supply unit: IP54/IP65 25.4lbs. (11.5kg)  
Marking unit: IP54 42.1lbs. (19.1kg); IP65 44.1lbs. (20kg)


### Applicable certifications

CE, TÜV/NRTL, FCC  
Compliance (no certification required): ROHS, CDRH/FDA

### Marking unit dimensions - IP54 with SHC60c marking head

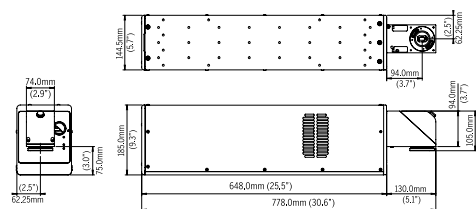

### Supply cabinet dimensions - IP54

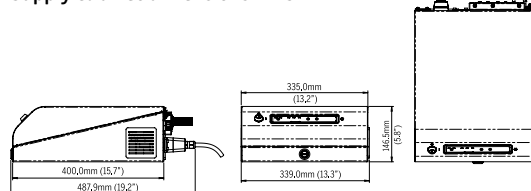

New printer quote 866-871-3226

Order supplies [shop.videojet.com](http://shop.videojet.com)

Call 800-843-3610

Email [info@videojet.com](mailto:info@videojet.com)

or visit [www.videojet.com](http://www.videojet.com)

Videojet Technologies Inc.

1500 Mittel Blvd. Wood Dale IL 60191 / USA

©2019 Videojet Technologies Inc. — All rights reserved.

Videojet Technologies Inc.'s policy is one of continued product improvement. We reserve the right to alter design and/or specifications without notice. Windows is a registered trademark of Microsoft Corporation. TrueType is a registered trademark of Apple Inc., registered in the United States and other countries.

Part No. SL000631  
ss-3340-us-0219  
Printed in U.S.A.

