



1000 Line UHS Inks

V536

Description

V536 is an invisible fluorescent general purpose MEK ink qualified for use in the Videojet 1000 Line UHS continuous inkjet (CIJ) printers. This ink is ideal for use in high-speed applications such as paperboard, plastic, and metal substrates for covert coding. It is specially designed to be invisible to an unaided eye and become fluorescent blue when activated by ultraviolet (UV) light.

Benefits






- Fluoresces @433nm when excited by UV light @365nm
- Survives pasteurization (65°C hot water bath) on metal substrates without blushing
- Survives retort (121°C steam heat) on metal substrates without blushing
- Resistant to acids, bases, Mil Spec Solvent C, mineral spirits, and oils

Applications

V536 ink is typically used by high-speed (3000/min) can/bottle/package manufacturers to apply production tracking codes to containers that are later sold to and filled by food packagers. End products are sometimes retorted, pasteurized, or heat processed after filling. This ink is suitable for reliable 2-D codes on dark color substrates and is also used as a means to unobtrusively code and track products through the supply chain. This is especially practical where the available package/label area is limited.

V536 delivers excellent adhesion on acrylonitrile butadiene styrene (ABS), polystyrene, steel, and paper board.

MEK-free Low VOC (V930) and MEK-free Drug Precursor free (V940) alternative cleaners are available.

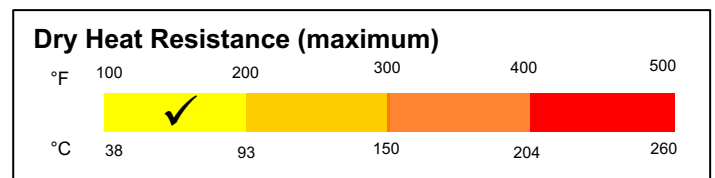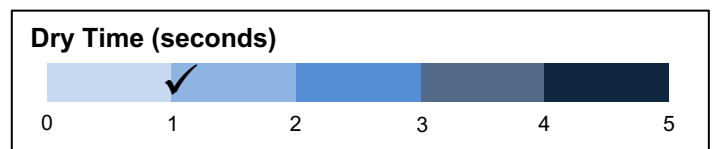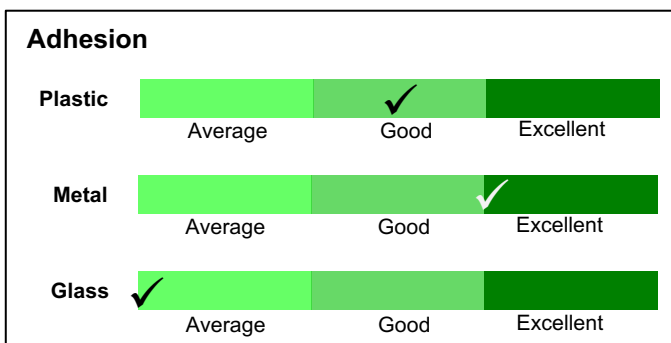

V536

1000 Line UHS Inks

Specifications

Product	Product Type	Color	Solvent Type	Container Size	Shelf life
V536	Ink	Black	MEK	750 ml (-D)	18 months*
V822	Make-up	Colorless to pale yellow	MEK	750 ml (-D), 5 L (-K)	24 months*
V901	Cleaner	Colorless to pale yellow	MEK	1 liter (-Q)	30 months*
V930	Cleaner	Colorless to pale yellow	Acetone/Ethanol	1 liter (-Q)	30 months*
V940	Cleaner	Colorless to pale yellow	Ethyl Acetate	1 liter (-Q)	30 months*

Storage

*Store between 2°C and 35°C.

Printer Parameters

Qualified Models	Operating Temperature	Operating Humidity	Nozzle Compatibility
1620 UHS, 1650 UHS	5-45°C	10-90%	50µm

Certifications and Approvals

iQMark™: V536 ink was responsibly designed and manufactured to maximize contrast, adhesion, and uptime while meeting safety, environmental, and regulatory requirements. Every batch is tested to ensure it meets strict quality control specifications.

Heavy Metals: V536 ink meets the requirements of CONEG model legislation including 94/62/EC. For more information, refer to Knowledge Article 1153.**

RoHS: V536 ink meets the requirements of the RoHS 2 Directive 2011/65/EU and Directive (EU) 2015/863. For more information, refer to Knowledge Article 1159.**

REACH: V536 ink is in compliance with EU Regulation (EC) No. 1907/2006 as amended. For more information, refer to Knowledge Article 1156.**

Halogens: V536 ink meets the International Electrotechnical Commission (IEC) definition of Halogen-Free. For more information, refer to Knowledge Article 7920.**

Food Packaging: V536 ink may be used on the non-food contact side of food packaging. The packaging must provide a barrier between the ink and the food. When used in this manner, the inks are in compliance per 21 CFR 170.3(e)(1), Regulation (EC) No. 10/2011, and Regulation (EC) No. 2023/2006. For more information, refer to Knowledge Article 7921.**

Other: V536 ink does not contain major allergens, animal based raw materials, nor organisms, genetically modified or not. For more information refer to Knowledge Articles 1148, 1190, and 1152.**

**Environmental, Health, Safety, and Regulatory information can change without notice, consult the current Safety Data Sheet (SDS) which is available on the Videojet website. Knowledge Articles are available by calling or emailing Videojet.

Order supplies shop.videojet.com

Call **800-843-3610**

Email info@videojet.com

Or visit www.videojet.com

Videojet Technologies Inc.

1500 Mittel Blvd. Wood Dale IL 60191 / USA

©2019 Videojet Technologies Inc. - All rights reserved. Videojet Technologies Inc.'s policy is one of continued product improvement. We reserve the right to alter design and/or specifications without notice.

